

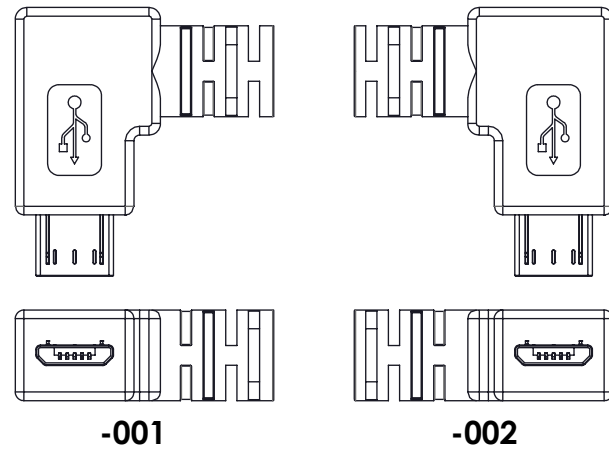
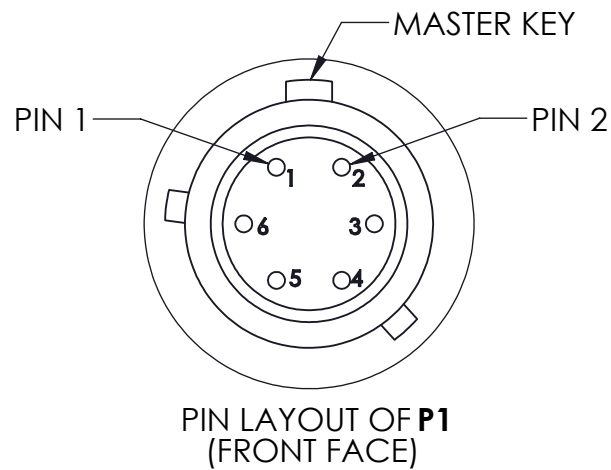
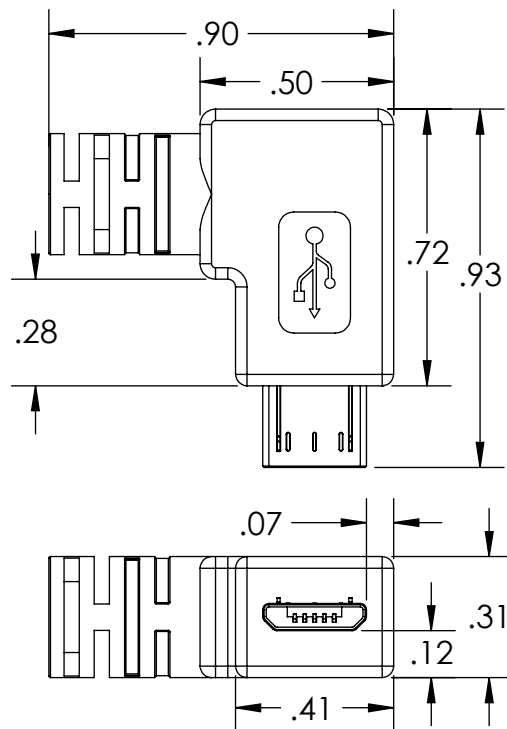


TABLE 1: WIRE RUN LIST		
P1	WIRE COLOR	P2
3	RED	1
5	WHITE	2
4	GREEN	3
2	BLACK	4
	YELLOW	5
SHELL	SHIELD	SHELL

TWISTED PAIR

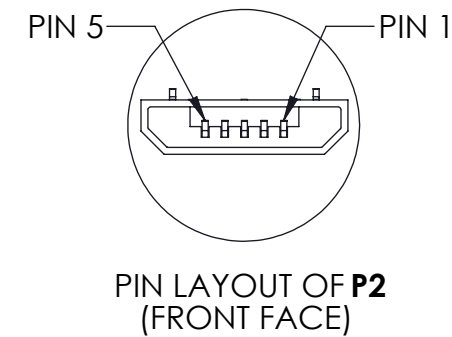

PART NUMBER DEVELOPMENT: **SN-808-046-XXX**
 INTERFACE ORIENTATION
-001 LEFT
-002 RIGHT

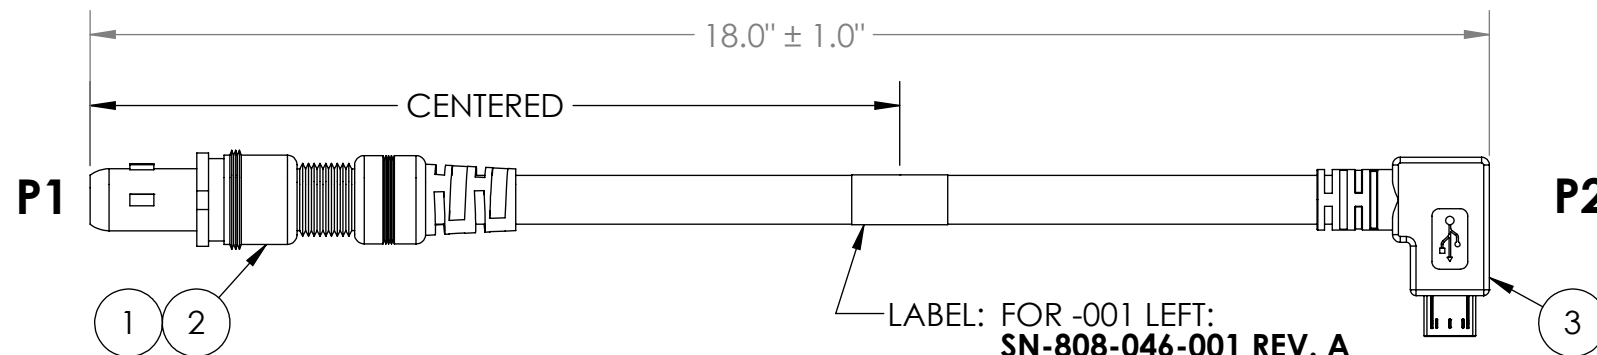

MICRO USB DIMENSIONS

NOTES:

- 1) SOLDERING IAW IPC-J-STD-001 CLASS II AS APPLICABLE.
- 2) CABLE ASSEMBLIES TO BE TESTED 100% FOR CONTINUITY, SHORTS, AND INSULATION RESISTANCE (250 VDC @ 100MOHM MINIMUM).
- 3) MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.
- 4) WIRE PER TABLE 1.
- 5) IDENTIFICATION: SEE DRAWING FOR TEXT AND LOCATION. USE ADHESIVE LABEL, WHITE WITH BLACK FONT.

LABEL: FOR -001 LEFT:
SN-808-046-001 REV. A
MMYY
1HJX9
 FOR -002 RIGHT:
SN-808-046-002 REV. A
MMYY
1HJX9

REV	DATE	DESCRIPTION OF CHANGE	ENG
C	6/8/17	4&5 TO 2 AND REMOVED TIE TO 6	TC



BILL OF MATERIALS			
ITEM NO.	PART NUMBER	QTY	NAME
1	807-309-06ZNU6-6PY	1	MALE NETT WARRIOR
2	BE-04	1	BANDING CLAMP
3	RR-MCBL-EXT-72GL5/	1	90° MICRO-B USB MALE:
	RR-MCBL-EXT-72GL5		RR-MCBL-EXT-72GL5 FOR -001 RR-MCBL-EXT-72GL5 FOR -002

REF. NUMBER: SN0458

SupplyNet 706 EXECUTIVE BLVD.
 SUITE B
 VALLEY COTTAGE, NY 10989

TITLE:
GLENAIR NW TO RIGHT ANGLE MICRO-B USB, 18"

UNLESS OTHERWISE SPECIFIED:		NAME	DATE
DIMENSIONS ARE IN: INCHES	TOLERANCES: .XX: ± 0.03	DRAWN	LS 3/9/17
	.XXX: ± 0.005	CHECKED	RB 3/9/17
ANGULAR: .X°: 1°	.XX°: 0.5°	COMMENTS:	
BREAK EDGES: .005 - .020	FILLET: .005 - .020	PROPRIETARY AND CONFIDENTIAL	
SURFACE FINISH:		THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.	
GEOMETRIC TOLERANCING PER: ASME Y14.5-2009		SIZE	DWG. NO.
MATERIAL: SEE DRAWING NOTES		B	SN-808-046-XXX
FINISH: SEE DRAWING NOTES		REV	C
DO NOT SCALE DRAWING	CAGE CODE: 1HJX9	SCALE: NA	WEIGHT:

SCALE: NA	WEIGHT:	SHEET 1 OF 1
-----------	---------	--------------