



REV	DATE	DESCRIPTION OF CHANGE	ENG
A	03/11/16	RELEASED. SEE DCN SN0091D	TC

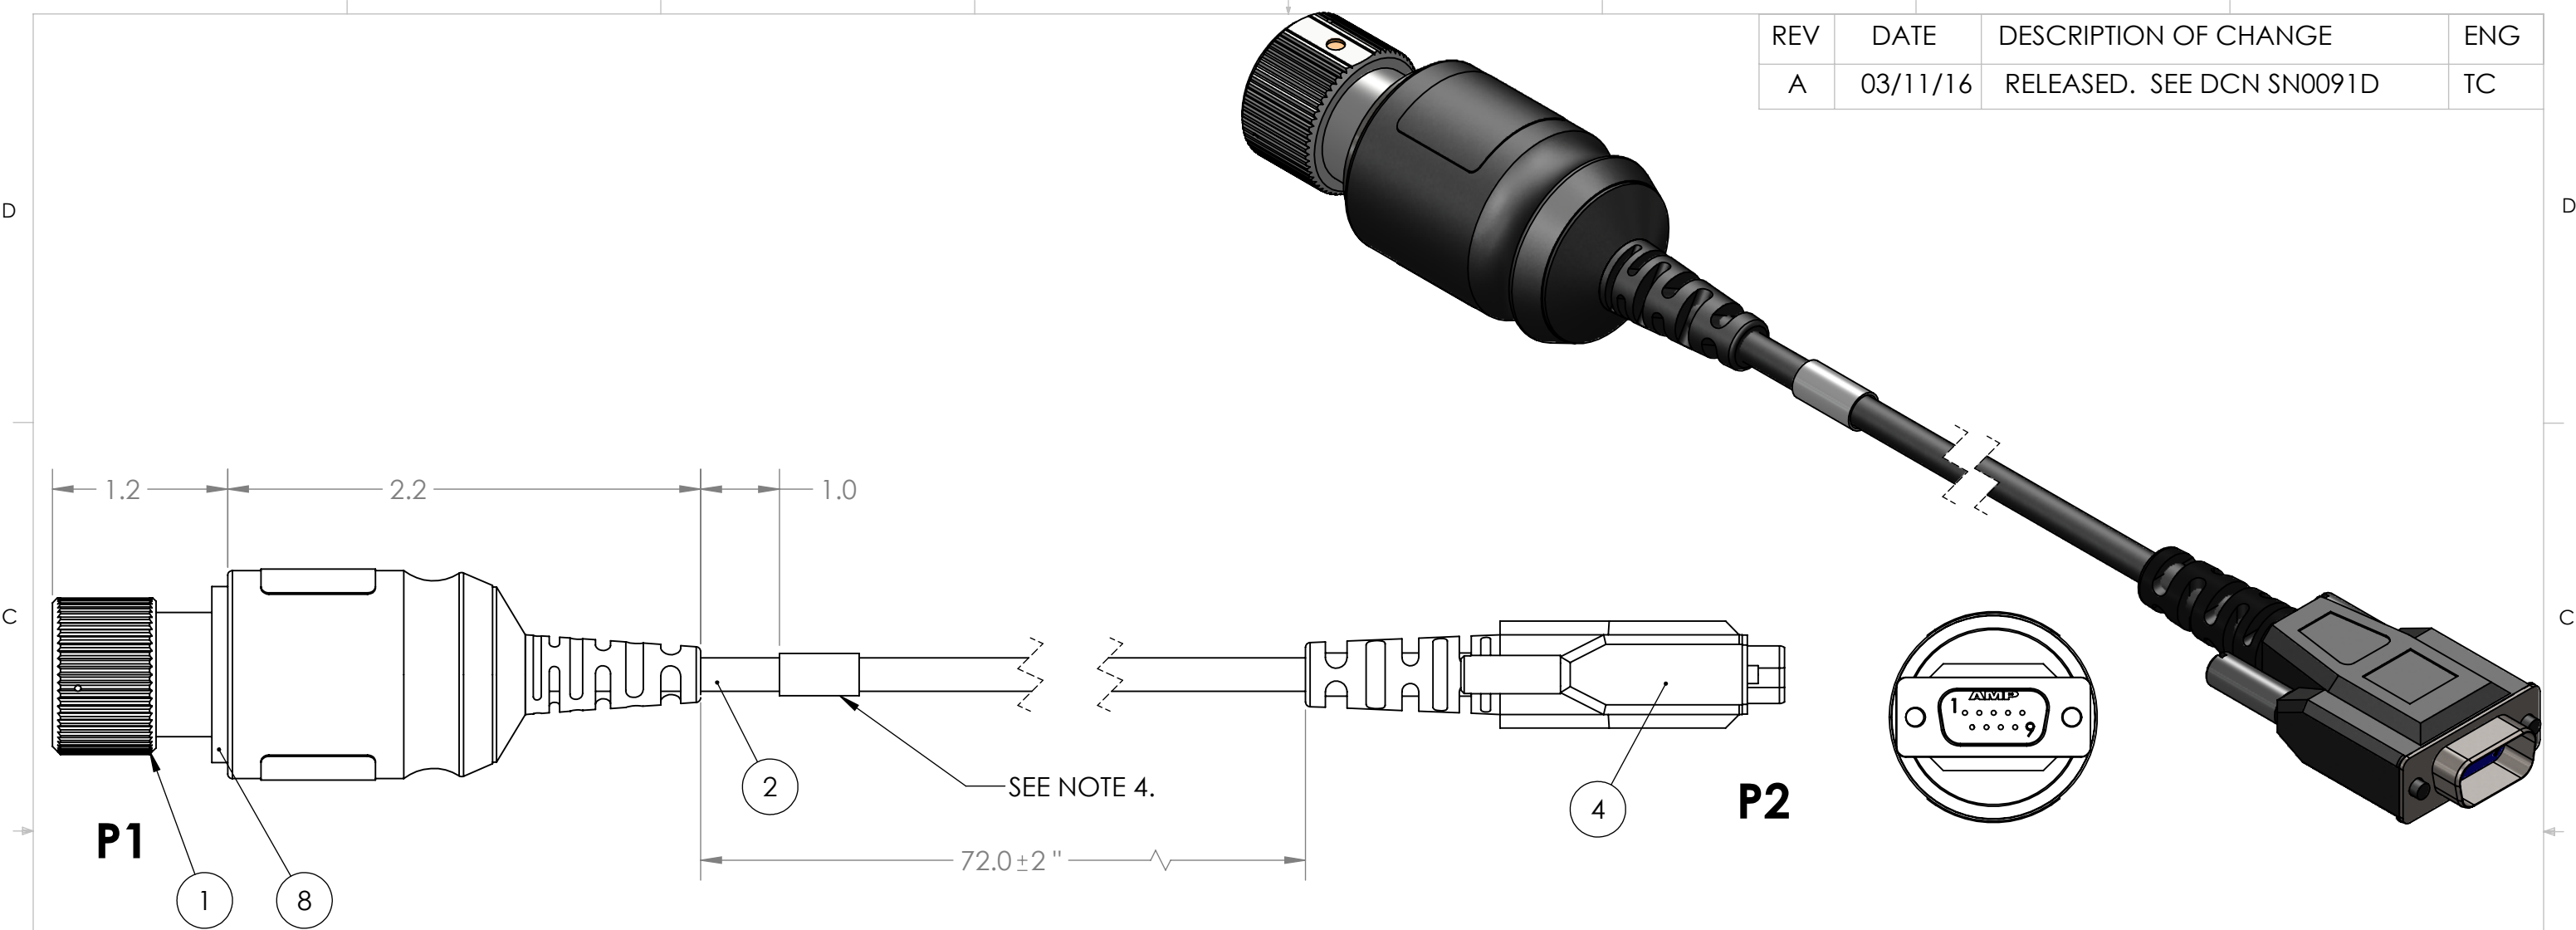

- NOTES:
- ITEM 2 INSTALLED PER MANUFACTURERS INSTRUCTIONS.
 - SOLDERING IAW IPC-J-STD-001 AS APPLICABLE.
 - CABLE ASSEMBLIES TO BE TESTED 100% FOR CONTINUITY (3 OHM MAX), SHORTS, AND INSULATION RESISTANCE (250 VDC @ 100MOHM MINIMUM).
 - IDENTIFICATION: IDENTIFY ON THE PART THE FOLLOWING INFORMATION FOR EACH PART DELIVERED. UOS PART MARKING ON WIRE IS PROHIBITED.
PN: SN-938 REV X (REV MARKING PER PO)
CAGE CODE: 1HJX9
DATE OF MFG: MM/YY
 USE ADHESIVE LABEL, WHITE WITH BLACK FONT.
 - SUPPLYNET FILE NUMBER SN0091
 - P2 OVERMOLD MATERIAL: 90A POLYETHER-TYPE THERMOPLASTIC POLYURETHANE (TPU).
 - MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.
 - APPLY ITEM 6 TO ALL SOLDER CONNECTIONS IN P1.
 - SECURE CABLE SHIELD TO P1 BACKSHELL USING BAND-IT CLAMP INCLUDED WITH ITEM 1.

UNLESS OTHERWISE SPECIFIED:
 DIMENSIONS ARE IN: INCHES
 TOLERANCES: .XX: ± 0.03
 .XXX: ± 0.005
 ANGULAR: .X°: 1°
 .XX': 0.5°
 BREAK EDGES: .005 - .020
 FILLETS: .005 - .020
 SURFACE FINISH:
 GEOMETRIC TOLERANCING
 PER: ASME Y14.5 -2009
 MATERIAL: SEE DRAWING NOTES
 FINISH: SEE DRAWING NOTES
 DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	TC	03/11/16
CHECKED	RJB	03/11/16
COMMENTS:		

REF. NUMBER: SN0091		
 706 EXECUTIVE BLVD. SUITE 8 VALLEY COTTAGE, NY 10989		
TITLE: RF-5800-MP DATA CABLE 10512-0775-A006 CROSS REFERENCE 10512-0775-A006		
SIZE	DWG. NO.	REV
B	SN-938	A
SCALE: NA	WEIGHT:	SHEET 1 OF 1