

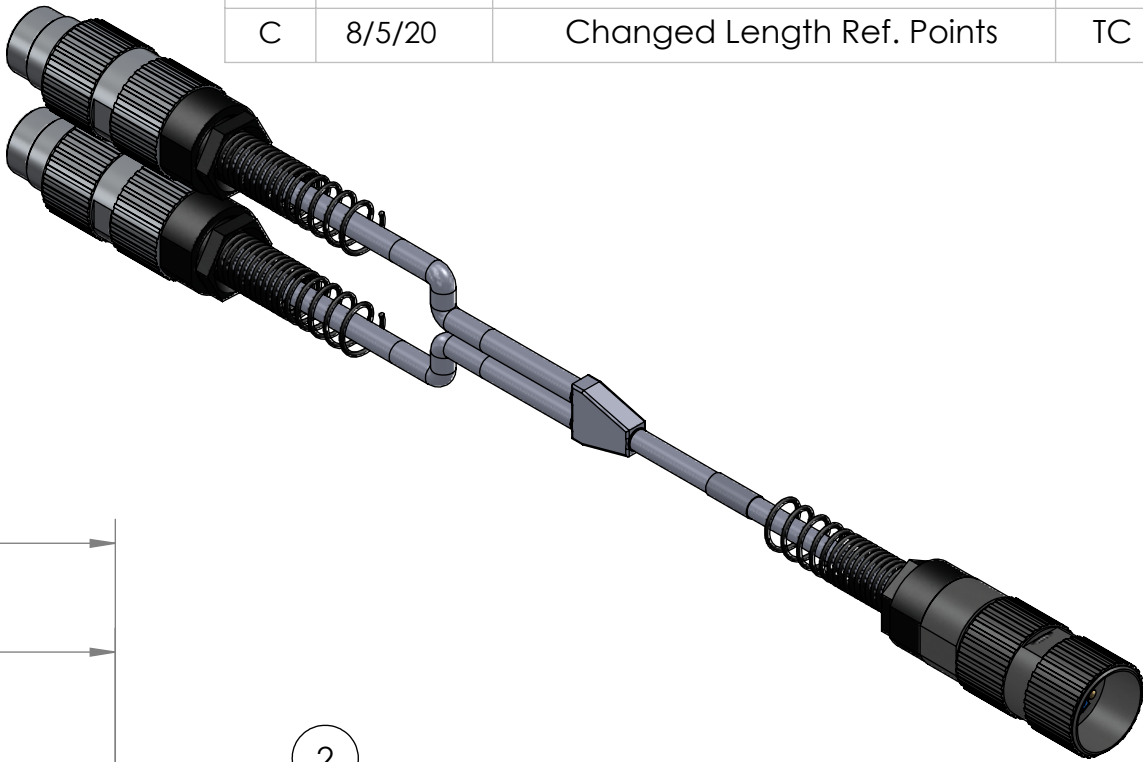
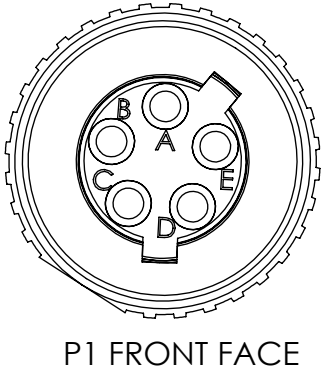


TABLE 1: WIRE RUN LIST				
U-229/U P1	WIRE COLOR	U-228/U P2	WIRE COLOR	U-228/U P3
A	BLACK	A	BLACK	A
B	RED	B	RED	B
C	BROWN	C	BROWN	C
D	WHITE	D	WHITE	D
E	GREEN	E	GREEN	E
SHELL	SHIELD	SHELL	SHIELD	SHELL

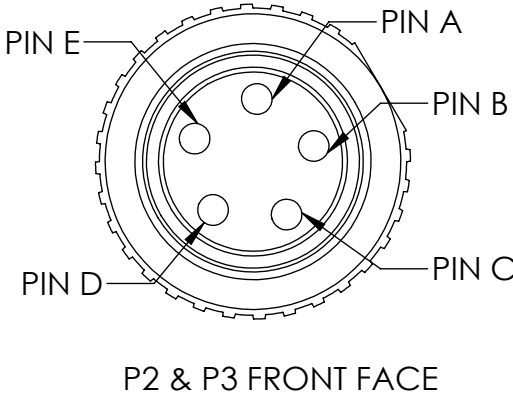

REV	DATE	DESCRIPTION OF CHANGE	ENG
C	8/5/20	Changed Length Ref. Points	TC

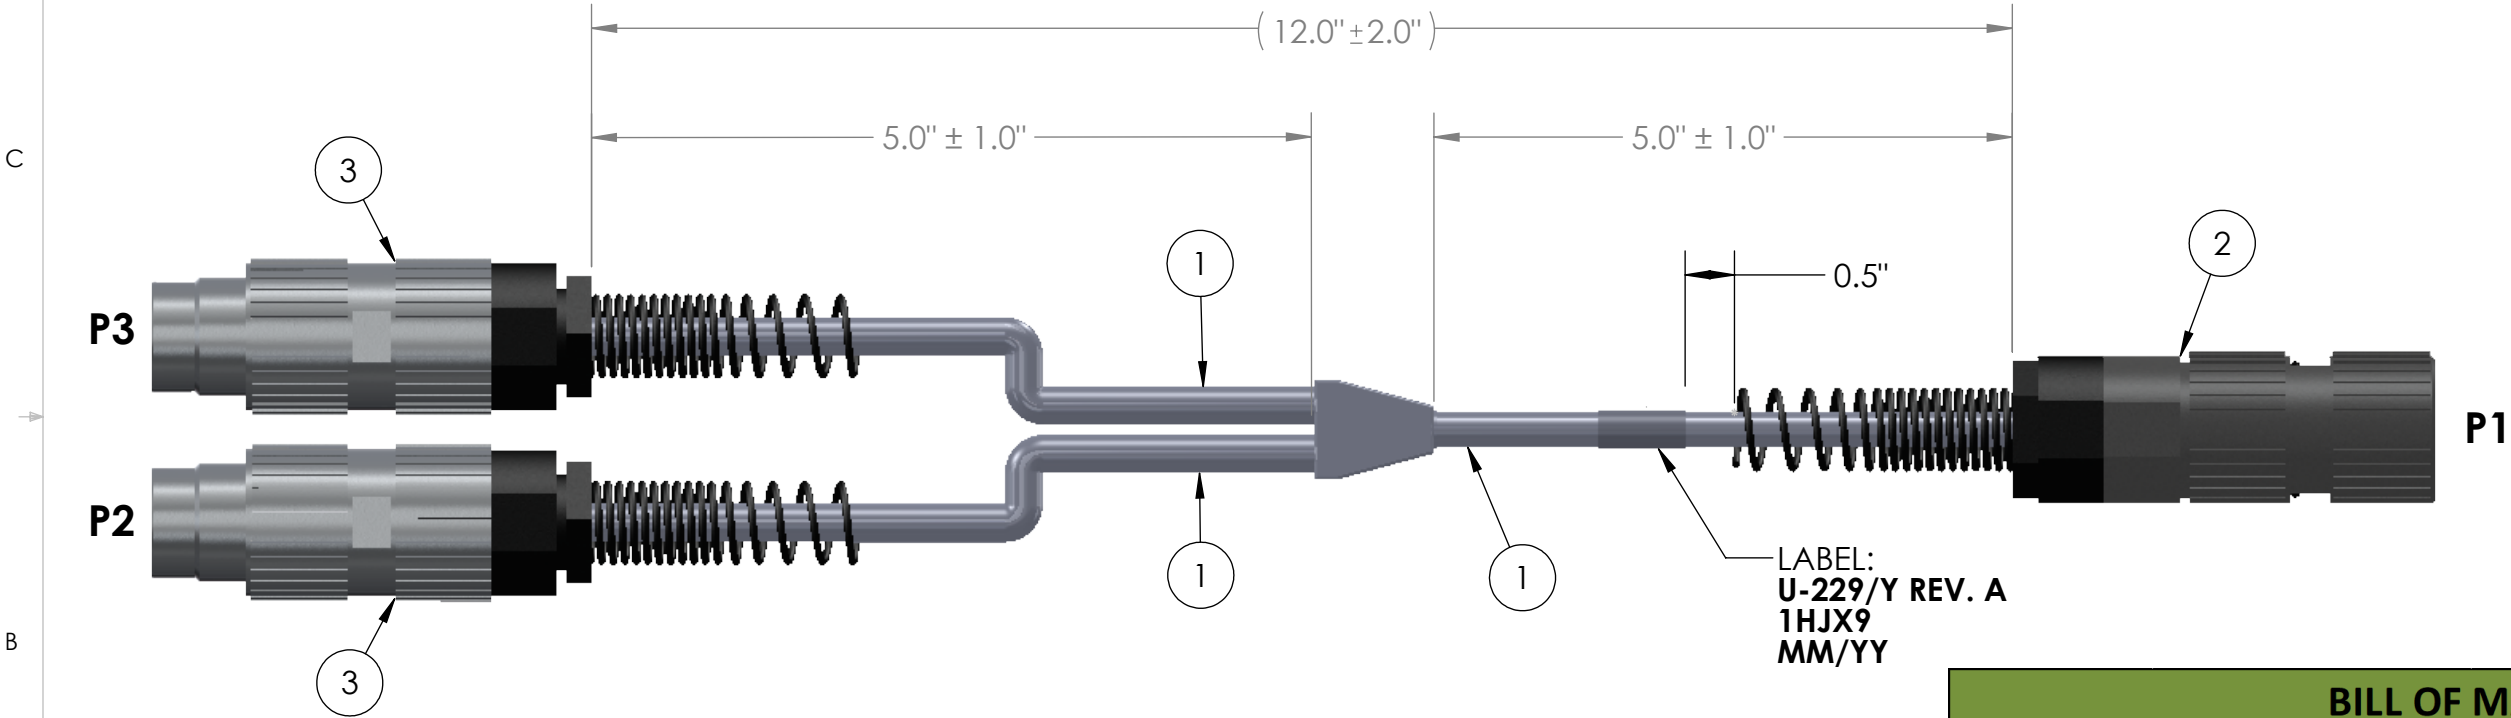

BILL OF MATERIALS			
ITEM NO.	PART NUMBER	QTY	NAME
1	51935	16"	Wire 24AWG 5C
2	U-229/U	1	5 PIN FEMALE
3	U-228/U	2	5 PIN MALE

- NOTES:
- JACKET: BLACK MATTE FINISH.
 - SOLDERING IAW IPC-J-STD-001 CLASS II AS APPLICABLE.
 - CABLE ASSEMBLIES TO BE 100% TESTED FOR CONTINUITY, SHORTS AND INSULATION RESISTANCE (250V @100MOHM MINIMUM)
 - IDENTIFICATION: BAG AND IDENTIFY ON PACKAGING THE FOLLOWING INFORMATION FOR EACH PART DELIVERED. UOS PART MARKING ON THE WIRE IS PROHIBITED:
PN: U-229/Y REV X (REV MARKING PER PO)
CAGE CODE: 1HJX9
DATE OF MFG: MM/YY
 - WIRING FUNCTION: SEE TABLE 1
 - REFERENCE SUPPLYNET FILE NUMBER SN0403.
 - MANUFACTURE AND INSPECT IAW IPC/WHMA A- 620 CLASS 2.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	706 EXECUTIVE BLVD. SUITE B VALLEY COTTAGE, NY 10989	
DIMENSIONS ARE IN: INCHES		DRAWN	TC	SupplyNet	
TOLERANCES: .XX: ± 0.03		CHECKED	RJB		
ANGULAR: .X*: 1°		COMMENTS:		U-229 SPLITTER CABLE	
.XX*: 0.5°					
BREAK EDGES: .005 - .020					
FILLETS: .005 - .020					
SUFACE FINISH:		<u>PROPRIETARY AND CONFIDENTIAL</u>		SIZE	
GEOMETRIC TOLERANCING		THE INFORMATION CONTAINED IN THIS		DWG. NO.	
PER: ASME Y14.5-2009		DRAWING IS THE SOLE PROPERTY OF		U-229/Y	
MATERIAL: SEE DRAWING NOTES		SUPPLYNET, INC. ANY REPRODUCTION		REV	
FINISH: SEE DRAWING NOTES		IN PART OR AS A WHOLE WITHOUT THE		C	
		WRITTEN PERMISSION OF SUPPLYNET INC.			
		IS PROHIBITED.			
DO NOT SCALE DRAWING		CAGE CODE: 1HJX9		SCALE: NA	WEIGHT:
				SHEET 1 OF 1	