
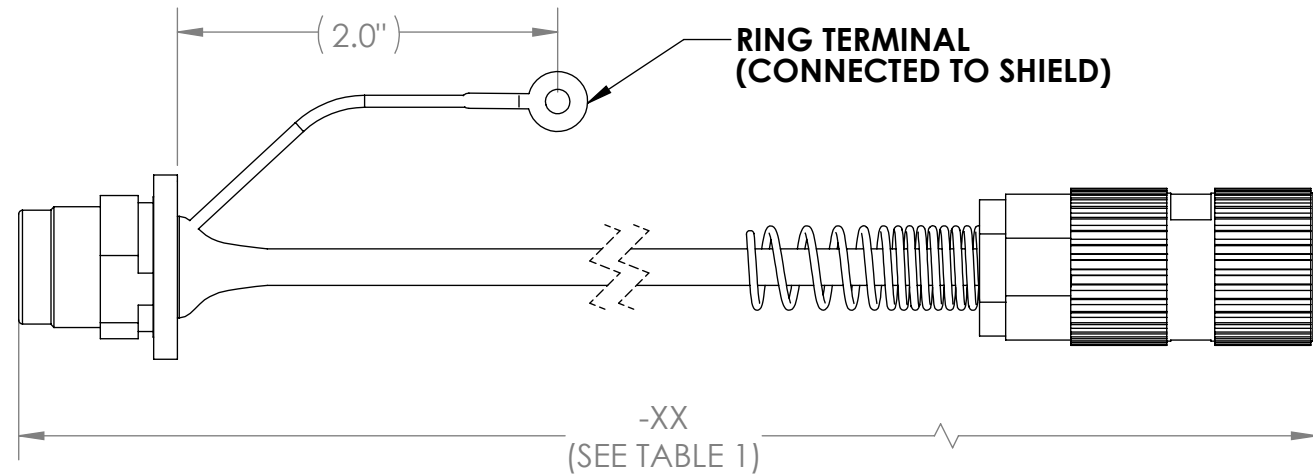


TABLE 1: WIRE LENGTH TABLE		
-XX	LENGTH	TOLERANCE
01	12.0"	± 1.0"
02	24.0"	± 1.5"
03	36.0"	± 1.5"
04	48.0"	± 2.0"
05	60.0"	± 2.0"
06	72.0"	± 2.0"
08	96.0"	± 2.0"
10	120.0"	± 2.5"
12	144.0"	± 3.0"
15	180.0"	± 3.0"

REV	DATE	DESCRIPTION OF CHANGE	ENG
A	7/12/17	INITIAL RELEASE	LS

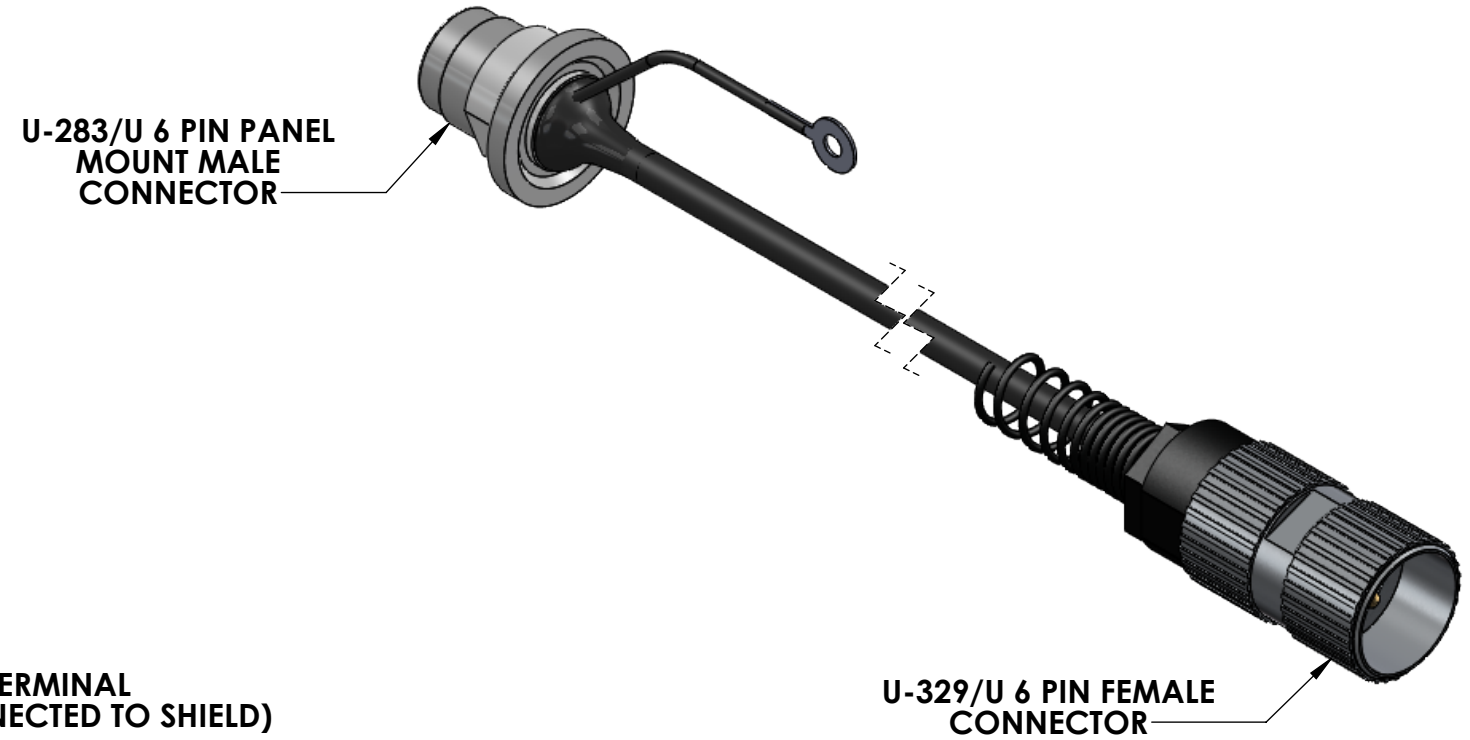

- NOTES:**
1. SOLDERING IAW IPC-J-STD-001 CLASS II AS APPLICABLE.
  2. MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.
  3. ALL PINS WIRED (STRAIGHT THROUGH)
  4. VARIABLE LENGTHS AVAILABLE (SEE TABLE 1), CUSTOM LENGTH AVAILABLE UPON REQUEST.

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN: INCHES  
 TOLERANCES: .XX: ± 0.03  
 .XXX: ± 0.005  
 ANGULAR: .X°: 1°  
 .XX°: 0.5°  
 BREAK EDGES: .005 - .020  
 FILLETS: .005 - .020  
 SURFACE FINISH:  
 GEOMETRIC TOLERANCING PER: ASME Y14.5-2009  
 MATERIAL: SEE DRAWING NOTES  
 FINISH: SEE DRAWING NOTES  
 DO NOT SCALE DRAWING

	NAME	DATE
DRAWN	LS	7/12/17
CHECKED	RJB	7/12/17
COMMENTS:		

REF. NUMBER: SN0048

**SupplyNet** 706 EXECUTIVE BLVD.  
 SUITE B  
 VALLEY COTTAGE, NY 10989

TITLE: **U-329 TO U-283 PANEL MOUNT CONNECTOR, VARIABLE LENGTH, CUSTOMER DRAWING**

SIZE <b>B</b>	DWG. NO. SN-908-PM-XX	REV <b>A</b>
---------------	-----------------------	--------------

CAGE CODE: 1HJX9

SCALE: NA WEIGHT: SHEET 1 OF 1