


TABLE 1: WIRE RUN LIST	
P1 (ITEM 1)	COLOR
1	RED
2	BLACK
3	BROWN
4	GREEN
5	WHITE
6	ORANGE
SHELL	SHIELD

TWISTED PAIR
SEE NOTE #7

TABLE 2: WIRE LENGTH CHART		
PART NUMBER & PART MARKING	"-XX" DIMENSION (INCHES)	TOLERANCE (INCHES)
SN-1087-8mm-0.5	6	+1.0", -0.0"
SN-1087-8mm-01	12	+1.0", -0.0"
SN-1087-8mm-02	24	+2.0", -0.0"
SN-1087-8mm-03	36	+2.0", -0.0"
SN-1087-8mm-04	48	+2.0", -0.0"
SN-1087-8mm-06	72	+4.0", -0.0"
SN-1087-8mm-08	96	+4.0", -0.0"
SN-1087-8mm-10	120	+6.0", -0.0"
SN-1087-8mm-12	144	+6.0", -0.0"
SN-1087-8mm-18	216	+6.0", -0.0"
SN-1087-8mm-20	240	+6.0", -0.0"
SN-1087-8mm-25	300	+6.0", -0.0"
SN-1087-8mm-30	360	+18.0", -0.0"

REV	DATE	DESCRIPTION OF CHANGE	ENG
1	04/19/21	RELEASED TO QUOTE	RAM
2	04/21/21	REMOVED TUBE LABEL, ADD LABEL TO ZIPLOCK BAG, P/N NOW 1087 (not 1077)	RAM

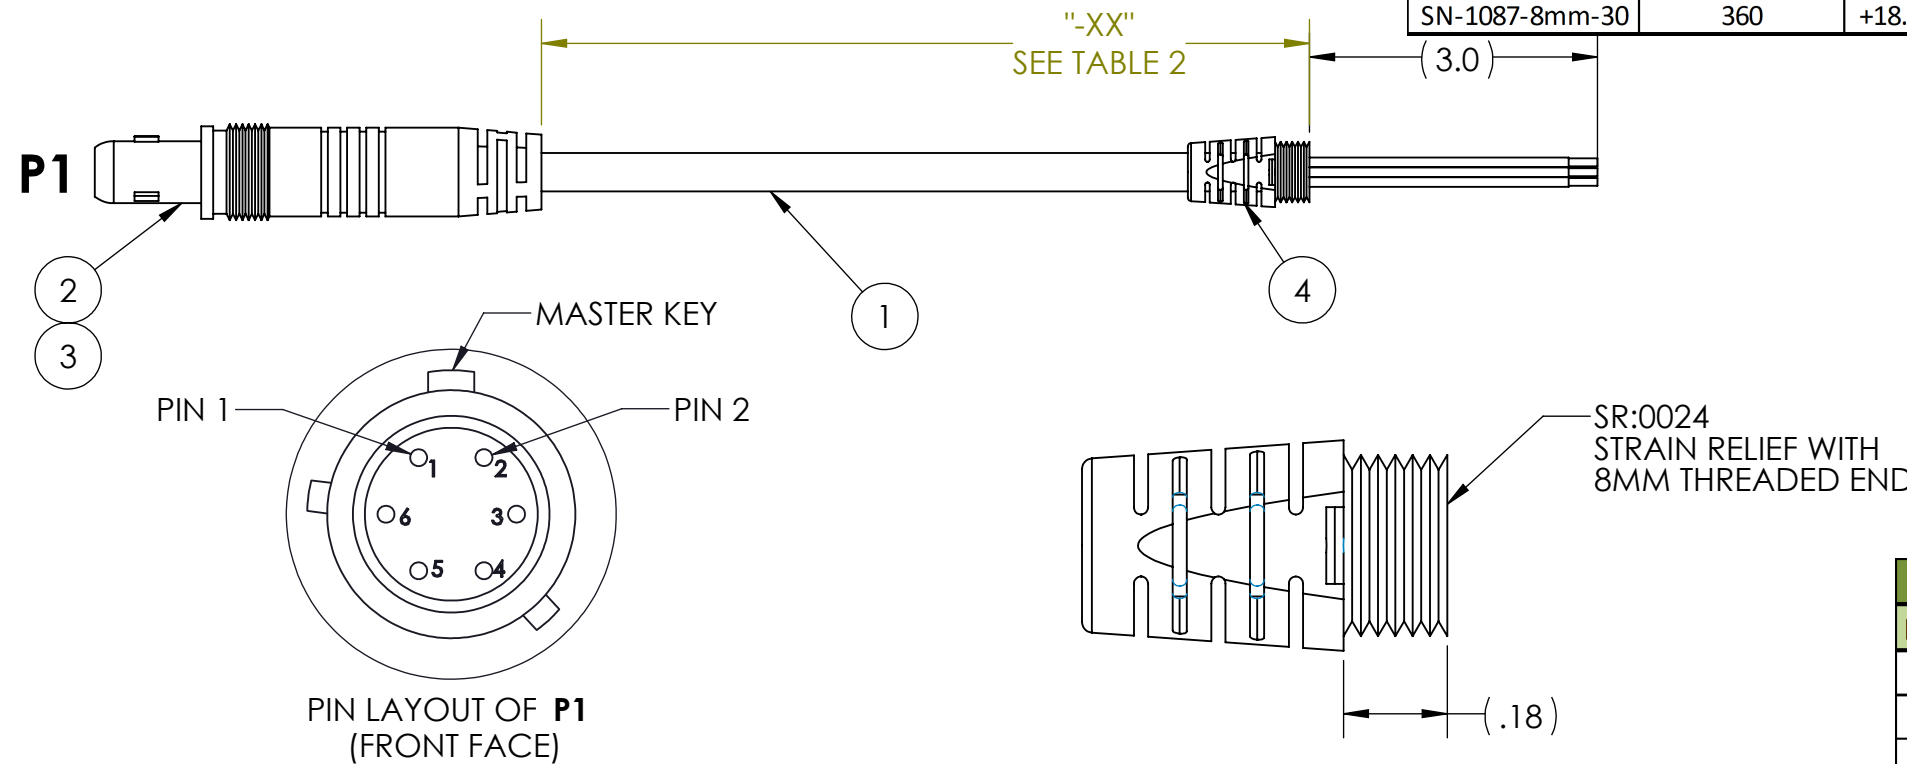

BILL OF MATERIALS			
ITEM NO.	PART NUMBER	QTY	NAME
1	BN226422FEPSSIL	1	6C, SHEILDDED, SILICONE JACKET, OD: 0.20"
2	807-309-06ZNU6-6PY	1	CONNECTOR, MALE, GLENAIR, 6 PIN
3	BE-04	1	STEEL BANDING
4	SR:0024	1	8mm THREADED STRAIN RELIEF, PU, BLK

NOTES:

- SOLDERING IAW IPC-J-STD-001 CLASS II AS APPLICABLE.
- CABLE ASSEMBLIES TO BE TESTED 100% FOR CONTINUITY AND SHORTS.
- ALL SOLDERED PINS ARE TO BE TESTED 100% FOR INSULATION RESISTANCE. (150 VDC @100 MOHM MINIMUM) EXCLUDE CHASSIS GROUND FROM THIS TEST.
- IDENTIFICATION: COMPLETED ASSEMBLIES ARE TO BE PLACED IN A ZIP POLY-BAG. PLACE A LABEL ON THE BAG WITH THE FOLLOWING INFORMATION. PLACE A WRAP-AROUND LABEL WHERE INDICATED ON DRAWING WITH THE FOLLOWING INFORMATION. UOS PART MARKING ON THE WIRE IS PROHIBITED:
SN-1087-8mm-XX REV. X (-XX AND REV X PER PO)
CAGE CODE: 1HJX9
MFD: MM/YY (MM = MONTH MANUFACTURED, YY = LAST TWO DIGITS OF YEAR MANUFACTURED)
- MANUFACTURE AND INSPECT IAW IPC/WHMA A-620 CLASS 2.
- WIRE PER TABLE 1.
- CONNECT TWISTED PAIR SHIELD/DRAIN WIRE TO OVERALL SHIELD AT BOTH ENDS OF CABLE.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE
DIMENSIONS ARE IN: INCHES	DRAWN	RAM 04/19/21
TOLERANCES: .XX: ± 0.03	CHECKED	RJB 04/19/21
.XXX: ± 0.005	COMMENTS:	
ANGULAR: .X*: 1°		
.XX*: 0.5°		
BREAK EDGES: .005 - .020		
FILLET: .005 - .020		
SURFACE FINISH:		
GEOMETRIC TOLERANCING PER: ASME Y14.5 -2009	PROPRIETARY AND CONFIDENTIAL	
MATERIAL: SEE DRAWING NOTES	THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SUPPLYNET, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SUPPLYNET INC. IS PROHIBITED.	
FINISH: SEE DRAWING NOTES	CAGE CODE: 1HJX9	
DO NOT SCALE DRAWING		

REF. NUMBER: SN0808	SupplyNet 706 EXECUTIVE BLVD. SUITE B VALLEY COTTAGE, NY 10989	
TITLE:	NETT WARRIOR CABLE MALE TO 8mm STRAIN RELIEF	
SIZE B	DWG. NO. SN-1087-8mm-XX	REV 2
SCALE: NA	WEIGHT:	SHEET 1 OF 1